



3090-XXX

ORIFICE SIZE	FLOW RATE
031	1-2.5GPM
062	2.5-5GPM
070	5-7GPM
113	7-10GPM
140	10-12GPM

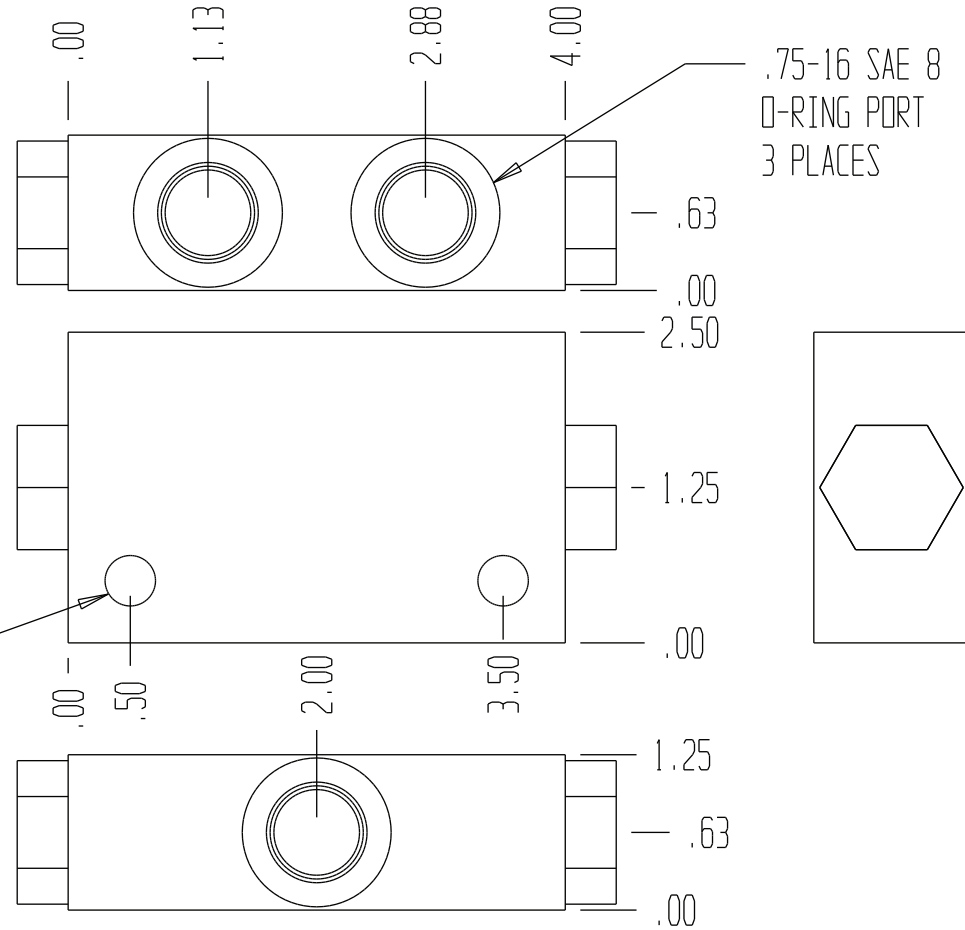

.406 DIA. THRU.
2 MOUNTING HOLES

GENERAL SPECIFICATIONS	
PRESSURE	5,000 PSI WORKING
FLOW RATE	SEE ORIFICE SIZE CHART ABOVE
MEDIA	PETROLEUM MINERAL BASE SAE 20. OTHER BASES MAY REQUIRE SEAL CHANGES.
SEAL KIT	1428
LEAKAGE - MAX.	EXTERNAL - NONE.

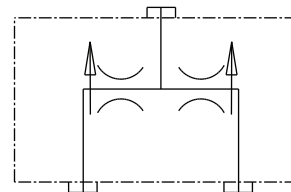

FUNCTIONAL SYMBOL

DIVIDE-COMBINE VALVE. USE IN MOTOR CIRCUITS OR WHERE CYLINDERS ARE NOT EXPECTED TO HOLD POSITION WHEN STOPPED IN MID-TRAVEL.