
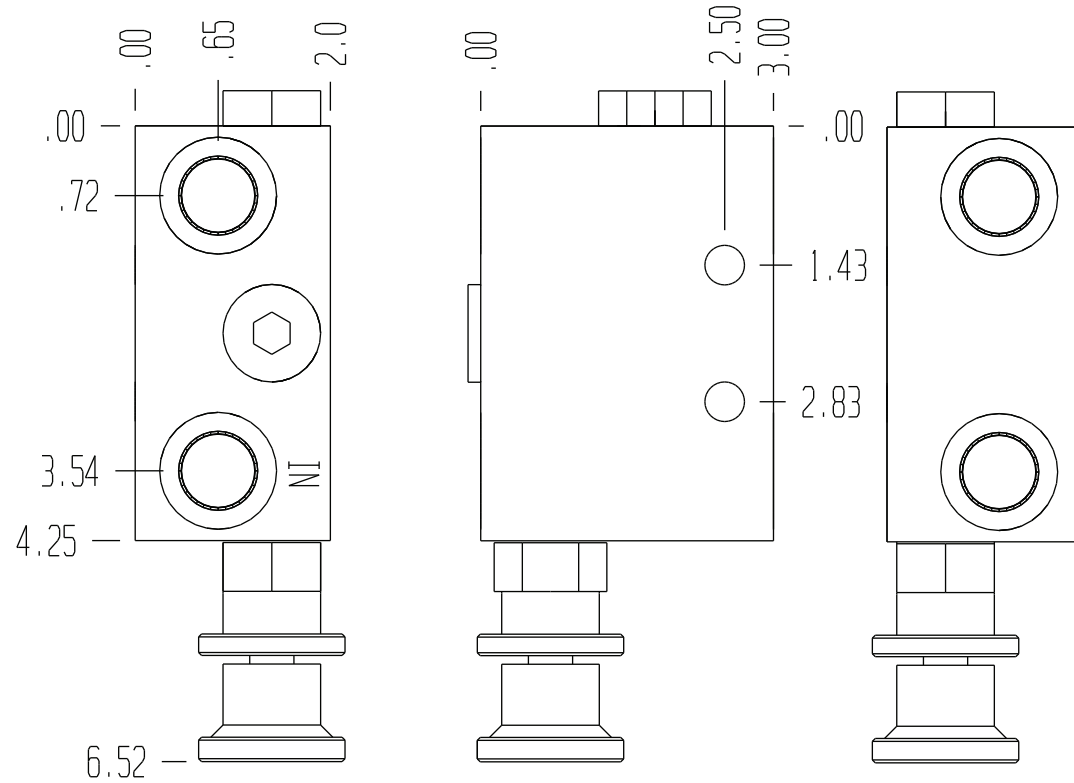


8088-X

1 = OPEN FLOW BETWEEN NEEDLE CART. AND CHECK CART.  
 2 = NORMALLY OPEN SOLENOID CART. BETWEEN NEEDLE  
 CART. AND CHECK CART.

8088-1 HAS OPEN FLOW THRU CAVITY.  
 8088-2 HAS NORMALLY OPEN SOLENOID  
 CARTRIDGE THAT PERMITS THIS PATH  
 TO BE CLOSED BY ELECTRIC INTERFACE.

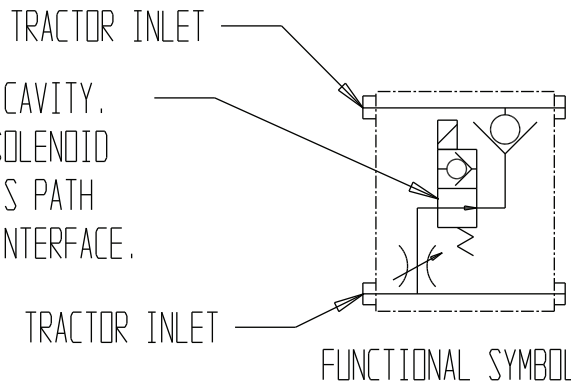

	GENERAL SPECIFICATIONS
PRESSURE	5,000 PSI WORKING
FLOW RATE	15 GPM
MEDIA	PETROLEUM MINERAL BASE SAE 20. OTHER BASES MAY REQUIRE SEAL CHANGES.
SEAL KIT	
LEAKAGE	EXTERNAL - NONE

ADJUSTABLE BY PASS.  
 USE WITH FULL TIME "LIVE" SCV TO PREVENT SHUT-DOWN  
 AT LOW FLOW ON "PRESSURE-FLOW COMPENSATED"  
 TRACTOR HYDRAULIC SYSTEMS.